

TECHNICAL SHEET

Prefabricated Building (E-Room)



710, avenue Davy
J9Y 0A8, Rouyn-Noranda
Québec, Canada

819-797-1234
info@airmp.ca
airmp.ca

In pictures



AIRMP offers a simple and effective solution for the needs of electrical and mechanical rooms.


AIRMP offers its expertise and advice so that our customers can obtain a shelter perfectly suited to their needs.

AIRMP manufactures and assembles the enclosures in their facility in Rouyn-Noranda and installs all the major equipment needed by the client.

Once assembled, the customer's building is transported to the construction site, unloaded at the planned location and connected to the various mechanical and electrical systems.

In this way, **AIRMP** offers a solution that limits the costs and delays of an on-site construction.

Finally, **AIRMP** is committed to provide a functional shelter and respecting the requests of its customer as soon as it arrives on site.

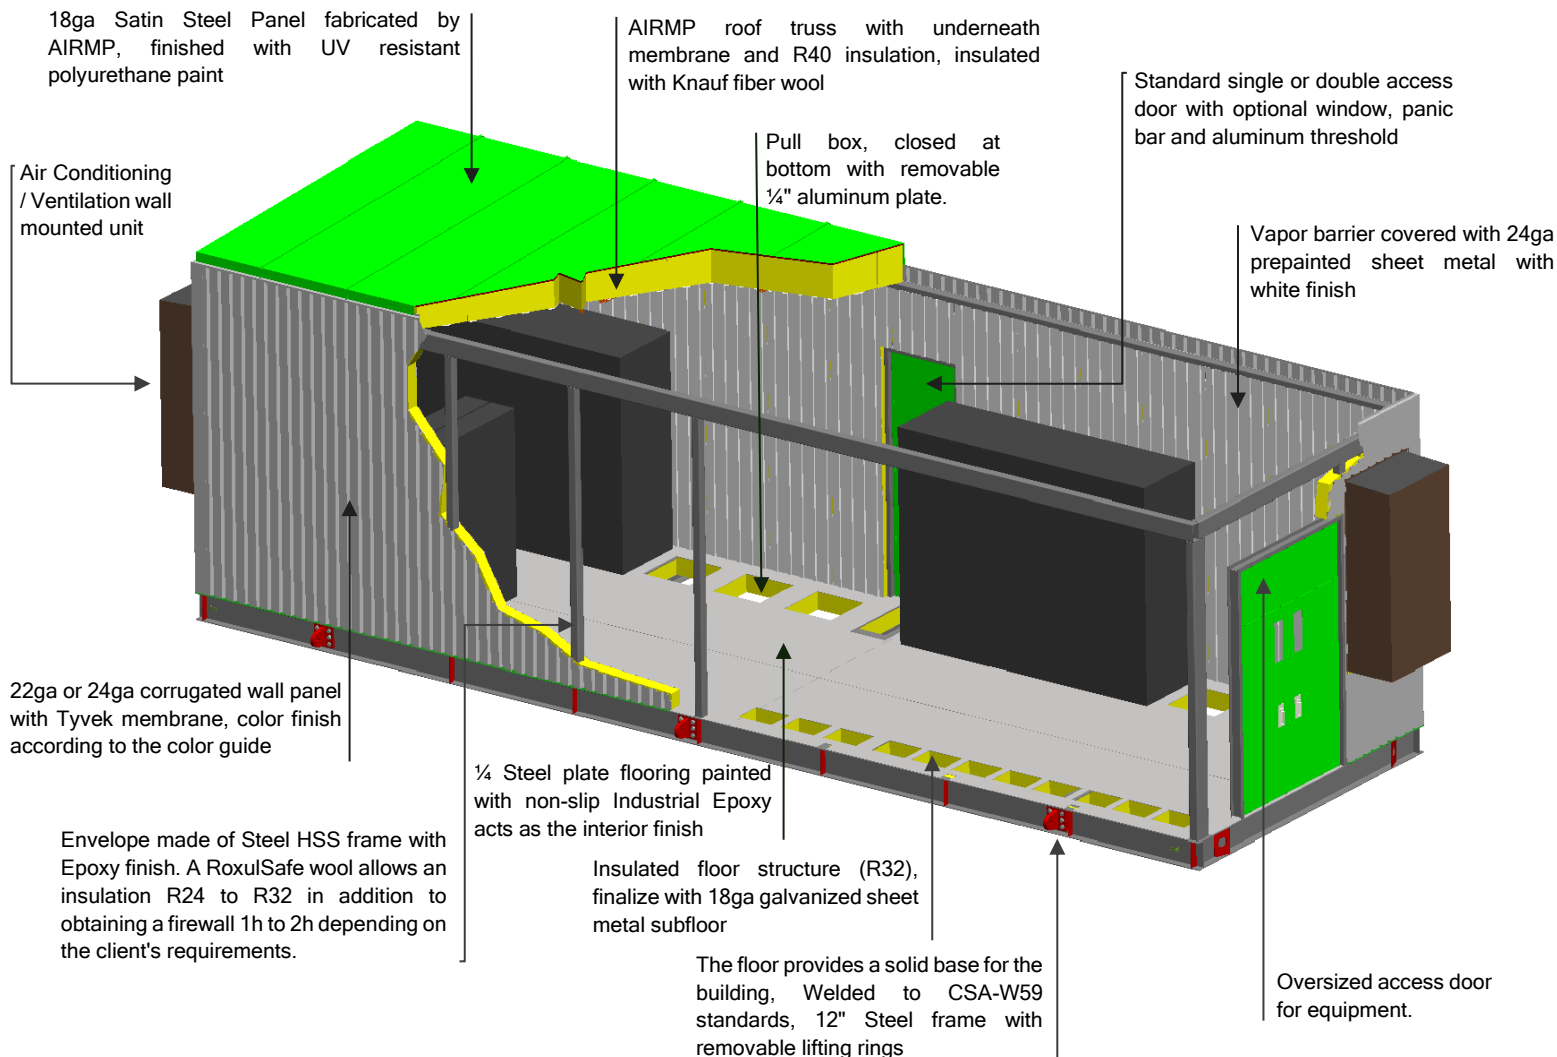

Features

1. Steel structure
2. Designed for snow loads
3. Possibility of having several modules
4. Wall and floor R32, roof R40
5. Fire protection 1h to 2h
6. Dimension 100% adaptable restricted only by transport.
7. Calculation and sealed lifting plan taken care of by our engineers,

Electrical systems offer

Aerotherm
Interior / exterior lighting
Lighting control panel
Emergency lighting
Interior and exterior outlets
Fire alarm system
Power transformer

Distribution panel 120/208
125VDC panel
400A isolation switches (2)
Asco transfer switch
Cable tray network
Wires and cables
Integration of your equipment

Ventilation / Conditioning

We are the specialists in this field.

- Ventilation systems adapted to the Great North of Canada
- Air conditioning
- Ventilation system for industrial sector and environment